

ENVIRONMENTAL IMPACT ASSESSMENT FOR THE PROPOSED HOTAZEL SOLAR PV ENERGY FACILITY, NORTHERN CAPE

SCOPING ASSESSMENT: SPECIALIST REPORT

DRAFT2: 31 July 2018

Document prepared for Cape EAPrac (Pty) Ltd;
On behalf of ABO Wind Hotazel PV (PTY) Ltd

Visual Resource Management Africa cc
P O Box 7233, George, 6531
Cell: +27 (83) 560 9911
E-Mail: steve@vrma.co.za
Web: www.vrma.co.za



TABLE OF CONTENTS

1	INTRODUCTION	7
1.1	TERMS OF REFERENCE.....	7
1.2	ASSUMPTIONS AND LIMITATIONS	8
1.3	APPROACH AND METHODS.....	9
2	PROJECT DESCRIPTION.....	11
2.1	LEGISLATIVE AND PLANNING CONTEXT	14
2.1.1	<i>John Taolo Gaetwewe District Municipality Spatial Development Framework (SDF) 14</i>	
2.1.2	<i>DEA&DP Guideline for involving Visual and Aesthetic Specialists in EIA Processes</i>	<i>14</i>
3	BASELINE ASSESSMENT	15
3.1	TOPOGRAPHY AND VISIBILITY	15
3.1.1	<i>Locality</i>	<i>15</i>
3.1.2	<i>Regional Topography</i>	<i>15</i>
3.1.3	<i>Project Visibility</i>	<i>17</i>
3.2	REGIONAL LANDSCAPE CHARACTER.....	18
3.2.1	<i>Mining and associated infrastructure.....</i>	<i>19</i>
3.2.2	<i>Other Renewable Projects</i>	<i>21</i>
3.2.3	<i>Other Landuse.....</i>	<i>22</i>
3.3	SITE LANDSCAPE CHARACTER	23
3.3.1	<i>Vegetation</i>	<i>23</i>
3.3.2	<i>Site Photographs and Descriptions.....</i>	<i>24</i>
3.3.3	<i>Scenic Quality and Receptor Sensitivity Ratings.....</i>	<i>27</i>
3.3.4	<i>Site Visual Resources.....</i>	<i>28</i>
4	PRELIMINARY FINDINGS	30
5	CONCLUSION	32
6	REFERENCES	33
7	ANNEXURE 1: SPECIALIST DECLARATION OF INDEPENDENCE	34
7.1	CURRICULUM VITAE.....	35
8	ANNEXURE 2: VRM CHECK SHEETS.....	41

TABLE OF FIGURES

FIGURE 1: REGIONAL LOCALITY MAP	7
FIGURE 2: PRELIMINARY PV ALTERNATIVE LOCALITY MAP (ALTERNATIVE WEST AND ALTERNATIVE EAST)	12
FIGURE 3: ALTERNATIVE WEST POWER LINE ROUTINGS ALT A AND ALT B	12
FIGURE 4: ALTERNATIVE EAST POWER LINE ROUTINGS ALT A AND ALT B.....	13
FIGURE 5: REGIONAL DIGITAL ELEVATION MODEL MAP	15
FIGURE 6: NORTH TO SOUTH TERRAIN PROFILE GRAPH.....	16
FIGURE 7: WEST TO EAST TERRAIN PROFILE GRAPH (BLACK MARKERS INDICATE EXISTING POWER LINES)	16
FIGURE 8: VIEW EAST FROM THE PROPOSED SITE OF THE NORTHERN EXTENTS OF THE KURUMAN HILLS.	16
FIGURE 9: APPROXIMATE VISIBILITY MAP GENERATED FROM A 4M OFFSET.....	17
FIGURE 10: KEY LANDMARKS AND INFRASTRUCTURE MAP	19
FIGURE 11: PHOTOGRAPH OF THE KALAGADI MANGANESE MINE AS SEEN FROM THE MINE ACCESS ROAD.....	20
FIGURE 12: PHOTOGRAPH FROM THE R31 SOUTH TOWARDS THE INTERTEK MINE THAT IS LOCATED ADJACENT TO THE SOUTH OF THE PROPOSED SITE.....	20
FIGURE 13: PHOTOGRAPH OF THE STRONG LEVELS OF CONTRAST CREATED BY THE COMBINED RAILWAY LINE AND POWER LINE INFRASTRUCTURE AS SEEN FROM THE PROPOSED UMTU POWER LINE ROUTING.	21
FIGURE 14: MAP DEPICTING THE RENEWABLE ENERGY MAPPING IN RELATION TO THE APPROXIMATE DEVELOPMENT AREA OF THE PROJECT.....	21
FIGURE 15: PHOTOGRAPH AN ISOLATED FARMHOUSE AS SEEN FROM THE R31 WHICH IS LOCATED ON THE PROPOSED PROPERTY.	22
FIGURE 16: SANBI VEGETATION TYPE MAP (SOUTH AFRICAN NATIONAL BIODIVERSITY INSTITUTE, 2012)	23
FIGURE 17: PROPOSED SITE PHOTOGRAPH LOCALITY MAP.	24
FIGURE 18: VIEW NORTH FROM PHOTO 1 OF THE GRASSLANDS AND SCATTERED BUSHVELD TREES WITH THE OLD HOTAZEL MINE WASTE ROCK DUMPS VISIBLE IN THE BACKGROUND.	25
FIGURE 19: VIEW NORTH FROM PHOTO 2 OF FARM ROADS AND MORE DENSE KATHU BUSHVELD TREES.....	25
FIGURE 20: VIEW NORTH FROM PHOTO 3 OF THE HIGHER BUSHVELD VEGETATION.	26
FIGURE 21: VIEW WEST FROM PHOTO 4 OF A SIMILAR BUSHVELD VEGETATION.	26
FIGURE 22: VIEW NORTH FROM PHOTO 5 OF THE EXISTING POWER LINE AND RAILWAY LINE INFRASTRUCTURE ALONG WHICH THE PROPOSED POWER LINE WOULD BE ROUTED.	27
FIGURE 23: VIEW WEST FROM PHOTO 6 OF THE EXISTING HOTAZEL SUBSTATION TO WHICH THE PROPOSED POWER LINE WOULD BE ROUTED.	27

LIST OF TABLES

TABLE 1: VRM CLASS MATRIX TABLE	10
TABLE 2: TECHNICAL DETAILS FOR THE PROPOSED PV FACILITY.	13
TABLE 3: PROPOSED PROJECT HEIGHTS TABLE	18
TABLE 4: SCENIC QUALITY RATING TABLE.....	28
TABLE 5: RECEPTOR SENSITIVITY RATING TABLE	28
TABLE 6: SCENIC QUALITY AND RECEPTOR SENSITIVITY SUMMARY TABLE.....	29

GLOSSARY

Best Practicable Environmental Option (BPEO)

This is the option that provides the most benefit, or causes the least damage, to the environment as a whole, at a cost acceptable to society, in the long, as well as the short, term.

Cumulative Impact

The impact on the environment, which results from the incremental impact of the action when added to other past, present, and reasonably foreseeable future actions, regardless of what agency or person, undertakes such other actions. Cumulative impacts can result from individually minor, but collectively significant, actions taking place over a period of time.

Impact (visual)

A description of the effect of an aspect of a development on a specified component of the visual, aesthetic or scenic environment, within a defined time and space.

Issue (visual)

Issues are concerns related to the proposed development, generally phrased as questions, taking the form of “what will the impact of some activity be on some element of the visual, aesthetic or scenic environment?”

Key Observation Points (KOPs)

KOPs refer to receptors (people affected by the visual influence of a project) located in the most critical locations surrounding the landscape modification, who make consistent use of the views associated with the site where the landscape modifications are proposed. KOPs can either be a single point of view that an observer/evaluator uses to rate an area or panorama, or a linear view along a roadway, trail or river corridor.

Management Actions

Actions that enhance the benefits of a proposed development, or avoid, mitigate, restore or compensate for, negative impacts.

Receptors

Individuals, groups or communities who would be subject to the visual influence of a particular project.

Sense of Place

The unique quality or character of a place, whether natural, rural or urban.

Scenic Corridor

A linear geographic area that contains scenic resources, usually, but not necessarily, defined by a route.

Scoping

The process of determining the key issues, and the space and time boundaries, to be addressed in an environmental assessment.

Viewshed

The outer boundary defining a view catchment area, usually along crests and ridgelines. Similar to a watershed. This reflects the area in which, or the extent to which, the landscape modification is likely to be seen.

Zone of Visual Influence (ZVI)

The ZVI is defined as ‘the area within which a proposed development may have an influence or effect on visual amenity.’

LIST OF ACRONYMS

<i>APHP</i>	Association of Professional Heritage Practitioners
<i>BLM</i>	Bureau of Land Management (United States)
<i>BPEO</i>	Best Practicable Environmental Option
<i>CALP</i>	Collaborative for Advanced Landscape Planning
<i>DEA&DP</i>	Department of Environmental Affairs and Development Planning (South Africa)
<i>DEM</i>	Digital Elevation Model
<i>DoC</i>	Degree of Contrast
<i>EIA</i>	Environmental Impact Assessment
<i>EMP</i>	Environmental Management Plan
<i>GIS</i>	Geographic Information System
<i>I&APs</i>	Interested and Affected Parties
<i>IEMA</i>	Institute of Environmental Management and Assessment (United Kingdom)
<i>IEMP</i>	Integrated Environmental Management Plan
<i>KOP</i>	Key Observation Point
<i>MAMSL</i>	Metres above mean sea level
<i>NELPAG</i>	New England Light Pollution Advisory Group
<i>PSDF</i>	Provincial Spatial Development Framework
<i>ROD</i>	Record of Decision
<i>SAHRA</i>	South African National Heritage Resources Agency
<i>SDF</i>	Spatial Development Framework
<i>SEA</i>	Strategic Environmental Assessment
<i>VAC</i>	Visual Absorption Capacity
<i>VIA</i>	Visual Impact Assessment
<i>VRM</i>	Visual Resource Management
<i>ZVI</i>	Zone of Visual Influence

All intellectual property rights and copyright associated with VRM Africa's services are reserved, and project deliverables, including electronic copies of reports, maps, data, shape files and photographs, may not be modified or incorporated into subsequent reports in any form, or by any means, without the written consent of the author. Reference must be made to this report, should the results, recommendations or conclusions in this report be used in subsequent documentation. Any comments on the draft copy of the Visual Impact Assessment (VIA) must be put in writing. Any recommendations, statements or conclusions drawn from, or based upon, this report, must make reference to it.

This document was completed by Silver Solutions 887 cc trading as VRM Africa, a Visual Impact Study and Mapping organisation located in George, South Africa. VRM Africa cc was appointed as an independent professional visual impact practitioner to facilitate this VIA.

This document was undertaken by the following team:

Stephen Stead	Director/ Visual Impact	APHP accredited VIA Practitioner
Lisa Schultz	Editing and Contrast Rating	Bachelor of Arts, Fine Art



Stephen Stead
APHP accredited VIA Specialist

1 INTRODUCTION

VRM Africa was appointed by Cape EAPrac (PTY) Ltd to undertake a Visual Impact Assessment for the proposed Hotazel Solar PV energy facility on behalf of *ABO Wind Hotazel PV (Pty) Ltd*. The proposed project is located in the Joe Morolong Local Municipality, in the Northern Cape Province. The nearest settlement is the small town of Hotazel located. The nearest large town is Kuruman in the Northern Cape province.



Figure 1: Regional locality map

1.1 Terms of Reference

According to the Bureau of Land Management, U.S. Department of Interior, landscape significance is assessed by differentiating between those landscapes of recognized or potential significance or sensitivity to modification and landscapes that have low sensitivity and scenic value. 'Different levels of scenic values require different degrees of management. For example, management of an area with high scenic value might be focused on preserving the existing character of the landscape, and management of an area with little scenic value might allow for major modifications to the landscape. Assessing scenic values and determining visual impacts can be a subjective process. Objectivity and consistency can be greatly increased by using standard assessment criteria to describe and evaluate landscapes, and to also describe proposed projects.'

(USDI., 2004)

The scope of the study is to cover the entire proposed project area, and the terms of reference for the study are as follows:

- Collate and analyse all available secondary data relevant to the affected proposed project area. This includes a site visit of the full site extent, as well as of areas where potential impacts may occur beyond the site boundaries.
- Consider all cumulative effects in all impact reports.
- Specific attention is to be given to the following:
 - Quantifying and assessing existing scenic resources/visual characteristics on, and around, the proposed site.
 - Evaluation and classification of the landscape in terms of sensitivity to a changing land use.
 - Determining viewsheds, view corridors and important viewpoints in order to assess the visual impacts of the proposed project.
 - Determining visual issues, including those identified in the public participation process.
 - Reviewing the legal framework that may have implications for visual/scenic resources.
 - Assessing the significance of potential visual impacts resulting from the proposed project for the construction, operation and decommissioning phases of the proposed project.
 - Assessing the potential cumulative impacts associated with the visual impact.
 - Identifying possible mitigation measures to reduce negative visual impacts for inclusion into the proposed project design, including input into the Environmental Management Plan (EMP).

1.2 Assumptions and Limitations

- Information pertaining to the specific heights of activities proposed for the development was limited and, where required, generic heights will be used to define the visibility of the project.
- Although every effort to maintain accuracy was undertaken, as a result of the Digital Elevation Model (DEM) being generated from satellite imagery and not being a true representation of the earth's surface, the viewshed mapping is approximate and may not represent an exact visibility incidence.
- The use of open source satellite imagery was utilised for base maps in the report.
- The viewsheds were generated using ASTER elevation data. (NASA, 2009)
- Some of the mapping in this document was created using Bing Maps (previously *Live Search Maps*, *Windows Live Maps*, *Windows Live Local*, and *MSN Virtual Earth*) and powered by the Enterprise framework.
- This study is based on assessment techniques and investigations that are limited by time and budgetary constraints applicable to the type and level of assessment undertaken. VRM Africa reserves the right to modify aspects of the project deliverables if and when new/additional information may become available from research or further work in the applicable field of practice, or pertaining to this study.

1.3 Approach and Methods

According to the Guidelines for Landscape and Visual Impacts by the Institute of Environmental Management and Assessment (United Kingdom), landscape impacts derive from changes in the physical landscape; which may give rise to changes in its character and how this is experienced. This in turn may affect the perceived value attributed to the landscape. Visual impacts relate to changes that arise in the composition of available views as a result of changes to the landscape, to people's response to any changes, and the overall impacts with respect to visual amenity. (U.K Institute of Environmental Management and Assessment (IEMA), 2002)

Approach

A site visit was undertaken on the 18th of June 2018. During the site visit, a visual confirmation of the desktop viewshed mapping was undertaken, to determine the anticipated zone of visual influence. From the property, key landforms and receptor points were identified. These local landforms and receptors points were then visited to determine the extent of the property visibility from the receptor locations. Photographs from the receptor locations in the direction of the property were also taken.

The process that VRMA followed when determining landscape significance is based on the United States Bureau of Land Management's (BLM) Visual Resource Management method (USDI., 2004). This mapping and GIS-based method of assessing landscape modifications allows for increased objectivity and consistency by using standard assessment criteria. The following key factors determine the suitability of landscape change:

- *“Different levels of scenic values require different levels of management. For example, management of an area with high scenic value might be focused on preserving the existing character of the landscape, and management of an area with little scenic value might allow for major modifications to the landscape. Determining how an area should be managed first requires an assessment of the area's scenic values”.*
- *“Assessing scenic values and determining visual impacts can be a subjective process. Objectivity and consistency can be greatly increased by using the basic design elements of form, line, colour, and texture, which have often been used to describe and evaluate landscapes, to also describe proposed projects. Projects that repeat these design elements are usually in harmony with their surroundings; those that don't create contrast. By adjusting project designs so the elements are repeated, visual impacts can be minimized” (USDI., 2004).*

Methods and Activities

The assessment comprises two main sections: firstly, the Visual Inventory to identify the visual resources along the proposed routing; and secondly, the Analysis Stage. The second impact assessment stage may require a Contrast Rating to assess the expected degree of contrast the proposed project would generate within the receiving landscape in order to define the Magnitude of the impact.

In terms of VRM methodology, landscape character is derived from a combination of scenic quality, receptor sensitivity to landscape change and distance from the proposed landscape change. Scenic Quality and Receptor Sensitivity are defined making use of the BLM check sheets located in the Annexure. These findings are then submitted to a VRM Matrix in Table 1 below. The VRM Classes are not prescriptive and are used as a guideline to determine the carrying capacity of a visually preferred landscape as a basis for assessing the suitability of the landscape change associated with the proposed project.

Table 1: VRM Class Matrix Table

		VISUAL SENSITIVITY LEVELS								
		High			Medium			Low		
SCENIC QUALITY	A (High)	II	II	II	II	II	II	II	II	II
	B (Medium)	II	III	III/IV *	III	IV	IV	IV	IV	IV
	C (Low)	III	IV	IV	IV	IV	IV	IV	IV	IV
DISTANCE ZONES		Fore/middle ground	Background	Seldom seen	Fore/middle ground	Background	Seldom seen	Fore/middle ground	Background	Seldom seen

* If adjacent areas are **Class III** or lower, assign **Class III**, if higher, assign **Class IV**

The visual objectives of each of the classes are listed below:

- The Class I objective is to preserve the existing character of the landscape, the level of change to the characteristic landscape should be very low, and must not attract attention. Class I is assigned when a decision is made to maintain a natural landscape;
- The Class II objective is to retain the existing character of the landscape and the level of change to the characteristic landscape should be low. The proposed development may be seen, but should not attract the attention of the casual observer, and should repeat the basic elements of form, line, colour and texture found in the predominant natural features of the characteristic landscape;
- The Class III objective is to partially retain the existing character of the landscape, where the level of change to the characteristic landscape should be moderate. The proposed development may attract attention, but should not dominate the view of the casual observer, and changes should repeat the basic elements found in the predominant natural features of the characteristic landscape; and

- The Class IV objective is to provide for management activities that require major modifications of the existing character of the landscape. The level of change to the landscape can be high, and the proposed development may dominate the view and be the major focus of the viewer's (s') attention without significantly degrading the local landscape character.

Should the landscape character be found to be significant, a contrast rating would be undertaken during the impacts phase to inform the impact ratings. A contrast rating is undertaken from the receptor Key Observation Points, where the level of change to the existing landscape is assessed in terms of line, colour, texture and form, in relation to the visual objectives defined for the area. KOPs are defined by the BLM as the people (receptors) located in strategic locations surrounding the property or development that make consistent use of the views associated with the site where the landscape modifications are proposed.

2 PROJECT DESCRIPTION

ABO Wind Hotazel PV (Pty) Ltd is proposing the development of Hotazel Solar on the Remaining Extent (Portion 0) of the farm York A 279, situated in the District of Hotazel in the Northern Cape Province. The proposed solar facility is planned to be bid into the Department of Energy's (DoE's) Renewable Energy (RE) Independent Power Producer (IPP) Procurement Programme (REIPPPP) with the aim of evacuating the generated power into the Eskom national electricity grid and aiding in the diversification and stabilisation of the country's electricity supply.

The Solar PV energy facility is to consist of solar photovoltaic (PV) technology with fixed, single or double axis tracking mounting structures, with a net generation (contracted) capacity of 100MW_{AC} (MegaWatts - Alternating Current), as well as associated infrastructure, which will include:

- On-site switching-station / substation;
- Auxiliary buildings (gate-house and security, control centre, office, warehouse, canteen & visitors centre, staff lockers etc.);
- Inverter-stations, transformers and internal electrical reticulation (underground cabling);
- Access and internal road network;
- Laydown area;
- Overhead 132kV electrical transmission line / grid connection connecting to the authorised Sekgame switching station;
- Rainwater tanks; and
- Perimeter fencing and security infrastructure.

The following maps identify the proposed layout and power line routings.



Figure 2: Preliminary PV alternative locality map (Alternative West and Alternative East)

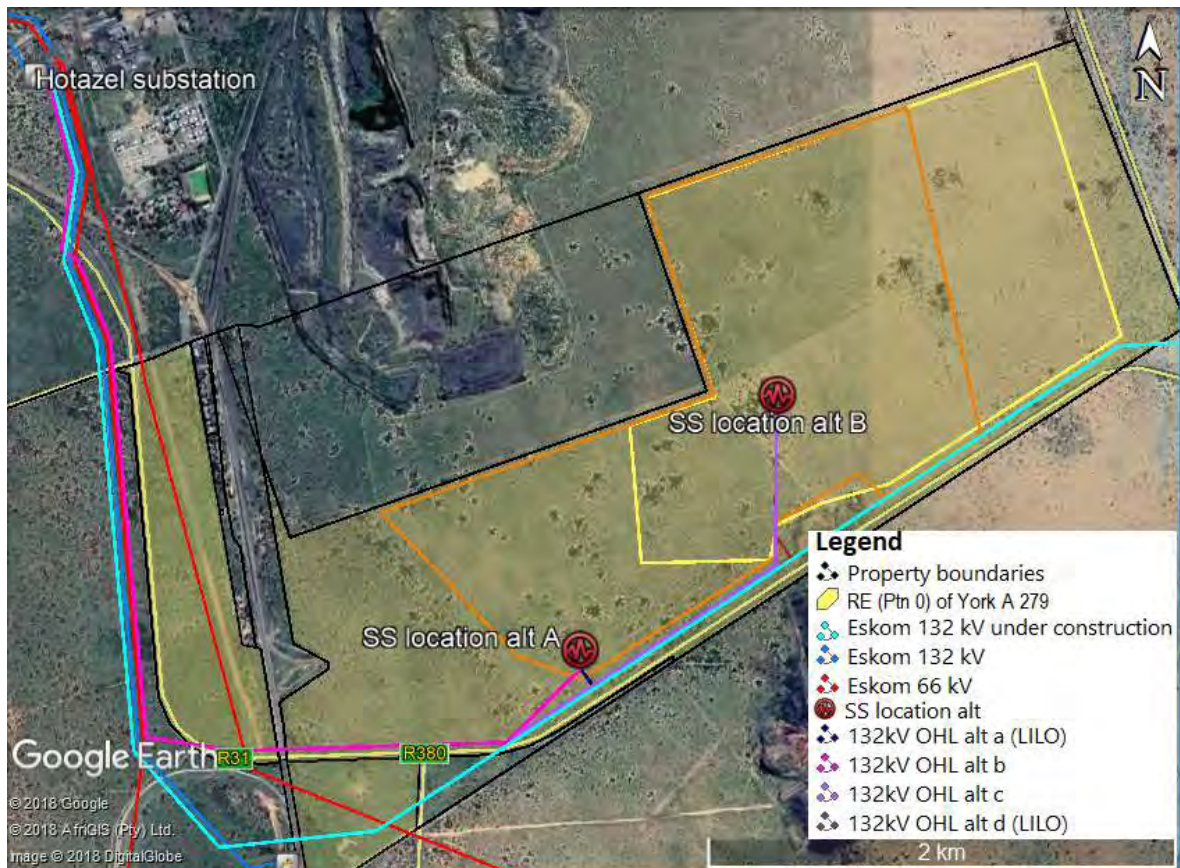


Figure 3: Alternative power line routings

Table 2: Technical details for the proposed PV facility.

Component	Description/ Dimensions
Location of the site	Approximately 3km South East of Hotazel
PV Panel area	250 ha with a total project footprint of approximately 275 ha
SG Codes	
Preferred Site access	Access to the site will be at one of the existing access points from the R31
Export capacity	100 MW
Proposed technology	PV with fixed, single or double axis tracking technology.
Height of installed panels from ground level	PV Structures not more than 4m
Width and length of internal roads	Main internal road - width: 6m, length: \pm 17 km Secondary internal roads – width: 5m, length: \pm 11 km

2.1 Legislative and Planning Context

In order to comply with the Visual Resource Management requirements, it is necessary to clarify which planning policies govern the proposed property area to ensure that the scale, density and nature of activities or developments are harmonious and in keeping with the sense of place and character of the area. The proposed landscape modifications must be viewed in the context of the planning policies from the following organizations guidelines:

2.1.1 *John Taolo Gaetwewe District Municipality Spatial Development Framework (SDF)*

The Joe Morolong Municipality falls within the John Taolo Gaetwewe District Municipality. With regard to tourism and solar energy, the John Taolo Gaetwewe District Municipality SDF makes the following statements regarding significance for the preparation and review of the document:

- *Regional Integration/ Cooperation (ZF Mgcawu & Republic of Botswana) with respect to Gamagara Corridor and Eco-Tourism Development Corridor;*
- ***Positioning the John Taolo District as the preferred investment area for solar energy due to its proximity to the Solar Corridor in ZF Mgcawu DM.***

No restrictions on solar energy were identified in the SDF.

2.1.2 *DEA&DP Guideline for involving Visual and Aesthetic Specialists in EIA Processes*

As specific Visual Guidelines are not provided by the area we have referred to the Western Cape Department of Environmental Affairs and Development Planning (DEA&DP) Guideline for involving visual and aesthetic specialists in EIA processes. This states that the Best Practicable Environmental Option (BPEO) should address the following:

- Ensure that the scale, density and nature of activities or developments are harmonious and in keeping with the sense of place and character of the area. The BPEO must also ensure that development must be located to prevent structures from being a visual intrusion (i.e. to retain open views and vistas).
- “Long term protection of important scenic resources and heritage sites.
- Minimisation of visual intrusion in scenic areas.
- Retention of wilderness or special areas intact as far as possible.
- Responsiveness to the area's uniqueness, or sense of place.” (Oberholzer, 2005)

3 BASELINE ASSESSMENT

3.1 Topography and Visibility

3.1.1 Locality

The proposed development site is located in the Northern Cape Province in the Joe Morolong Local Municipality (formerly known as Moshaweng Local Municipality). It is located within John Taolo Gaetsewe District Municipality (previously Kgalagadi District Municipality). The nearest large towns to the proposed project are Kuruman, which is located approximately 60km to the southeast, and Kathu located approximately 70km to the south. The small mining village of Hotazel is located approximately 5km to the northwest of the proposed site. The proposed site is accessed via the R31 that connects the town of Hotazel to Kuruman.

3.1.2 Regional Topography

A regional Digital Elevation Model (DEM) was generated using NASA ASTER 90m DEM data (NASA, 2009). The data is generalised and used to better understand the broader terrain. Graphical representation of the terrain was also implemented with two profile lines cutting through the study area and extending beyond the area approximately 15km on either side as indicated on Figure 5 below.

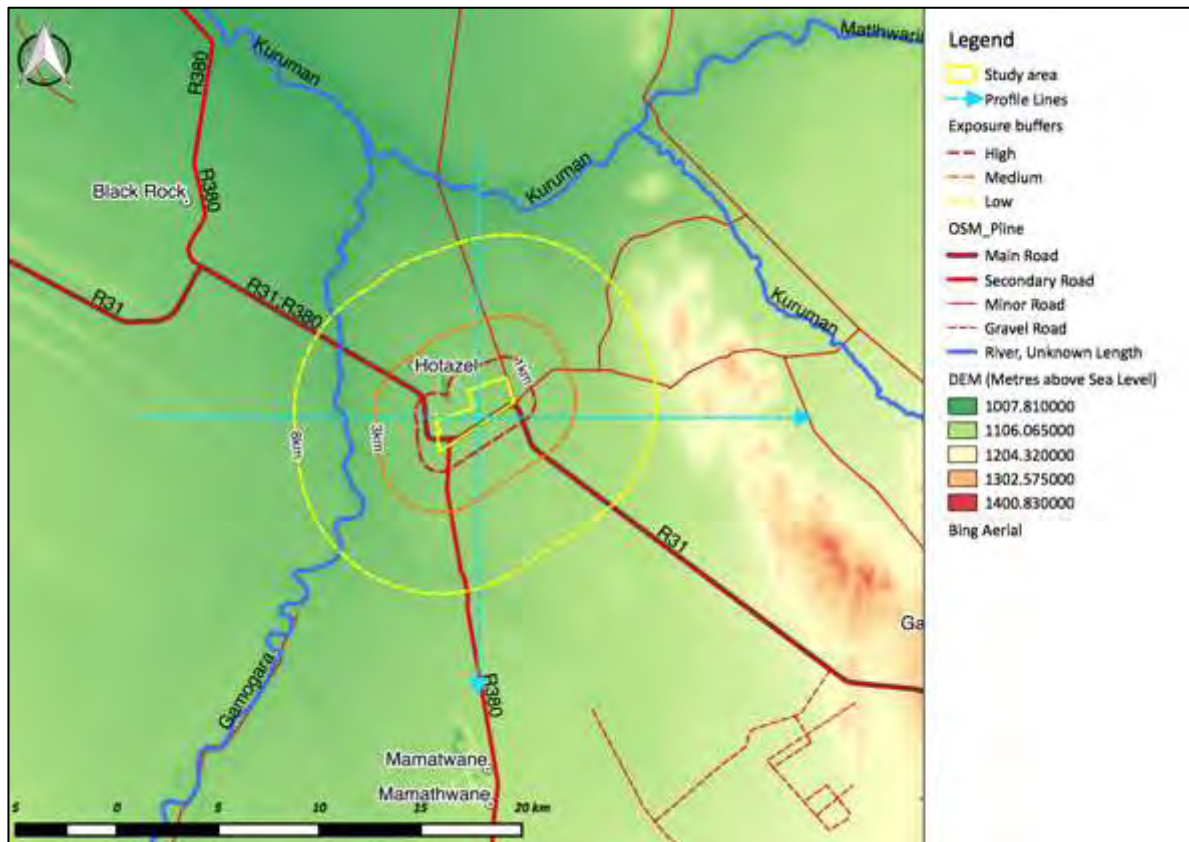


Figure 4: Regional Digital Elevation Model Map

The North to South Terrain Profile indicates the study area located within the 1070mamsl range, with flatter terrain around the study area. Over 15km to the north, the elevation drops 50m down to the Kuruman River Valley. To the south the elevation remains within a similar range, but drops slightly into a shallow depression, before continuing with a gentle increase in elevation up to a high point of 1100mamsl.

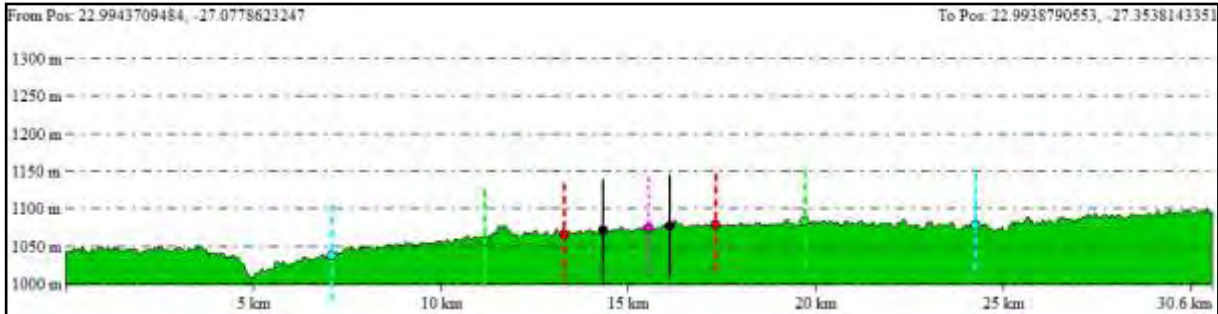


Figure 5: North to South Terrain Profile Graph

The West to East Terrain Profile places the study area within the 1070m range, with a similar terrain surrounding the study area. The drainage is to the West, dropping to a low of 1050mamsl in the Gamogara River Valley. To the east, the terrain gradually increases in elevation, with a sudden increase in elevation as the profiles crosses the northern reaches of the Kuruman Hills which are approximately 100m in height. The profile of the Kuruman Hills is depicted in the photograph below which was taken from the R31 towards the east. The hills feature low in profile and rounded in nature, and does not create a dominating natural feature in the landscape.

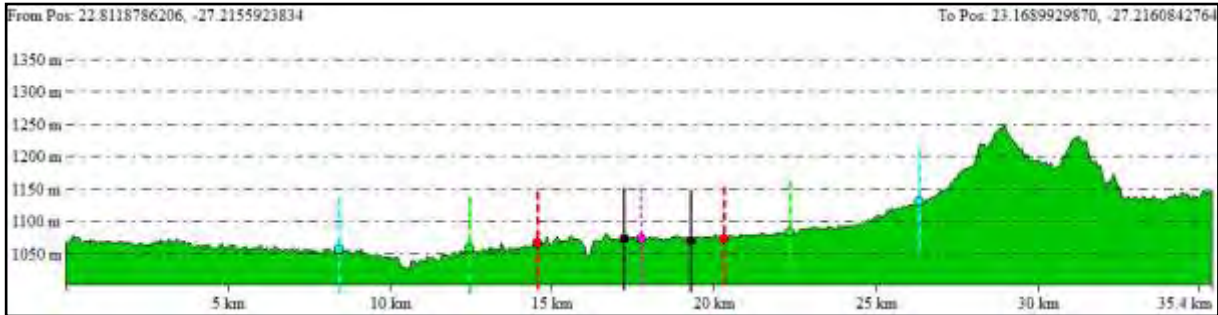


Figure 6: West to East Terrain Profile Graph (black markers indicate existing power lines)

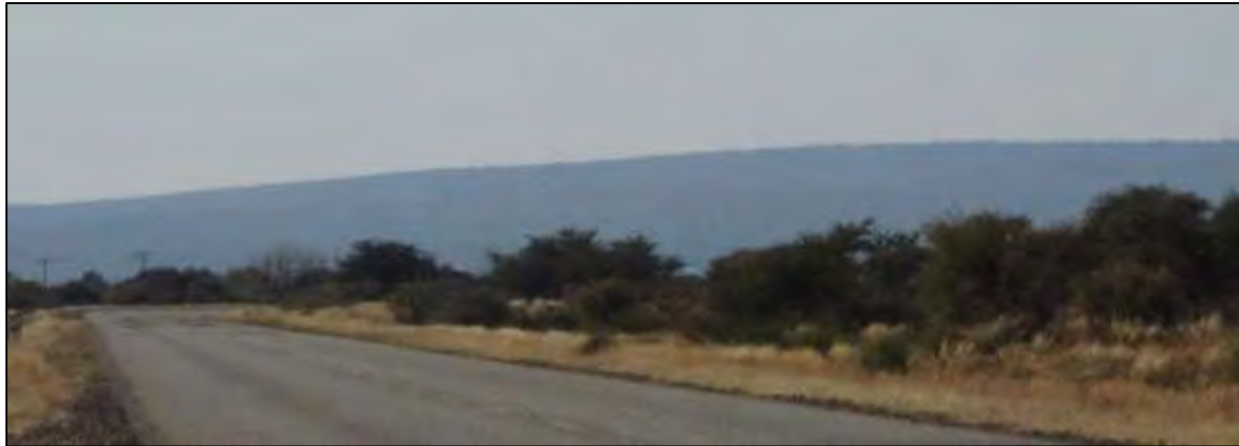


Figure 7: View east from the proposed site of the northern extents of the Kuruman Hills.

As can be seen in the Digital Elevation Model map above, the topography of the greater area surrounding the study area is relatively flat with the exception of the low hill range to the east. The main drainage of the greater region is to the north via the Gamogara River (approx. 7km west), which is a tributary of the larger Kuruman River located approximately 10km to the north. The only natural topographic feature within the greater area are the Kuruman Hills that are located approximately 15km to the southeast of the study site and rise approximately 100m above the generated terrain.

3.1.3 Project Visibility

The visible extent, or viewshed, is “the outer boundary defining a view catchment area, usually along crests and ridgelines” (Oberholzer, 2005). In order to define the extent of the possible influence of the proposed project, a viewshed analysis was undertaken from the proposed site at a specified height above ground level as indicated in Table 13 below, making use of open source NASA ASTER Digital Elevation Model data (NASA, 2009). The extent of the viewshed analysis was restricted to a defined distance that represents the approximate zone of visual influence (ZVI) of the proposed activities, which takes the scale, and size of the proposed projects into consideration in relation to the natural visual absorption capacity of the receiving environment. The maps are informative only as visibility tends to diminish exponentially with distance, which is well recognised in visual analysis literature (Hull & Bishop, 1988).

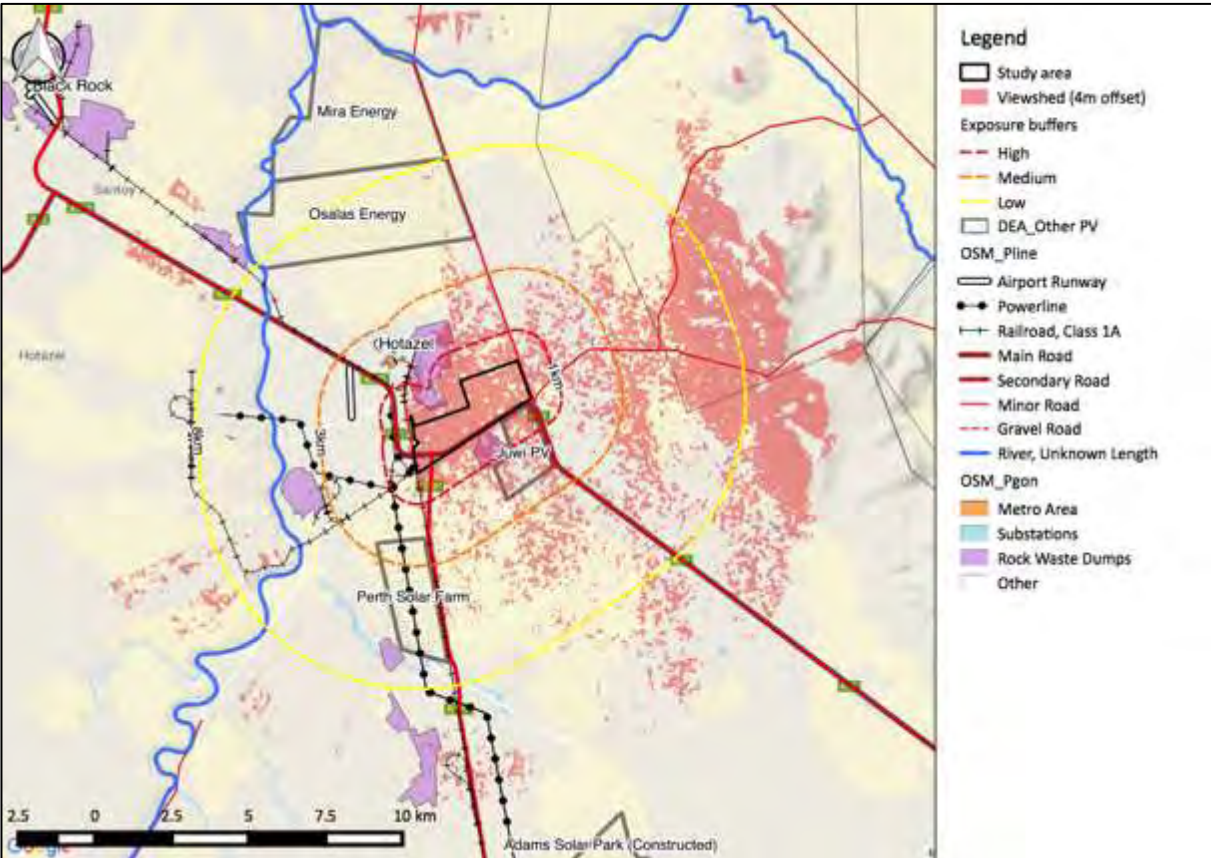


Figure 8: Approximate visibility map generated from a 4m Offset.

Table 3: Proposed Project Heights Table

Proposed Activity	Approx. Height (m)	Viewshed Extent (km)
PV Panels	4m	12

A viewshed analysis was undertaken for the site making use of ASTER 90m Digital Elevation Model data. It is important to note that the terrain model **excludes vegetation and structural screening**. The Offset value was set at 4m above ground to represent the approximate height of the proposed PV panels.

As indicated in Figure 8 above, within the high exposure 2km buffer area visible incidence is most likely as a result of the mainly flat terrain of the study area and immediate surrounds. Due to the medium sized Bushveld vegetation that is found in the area, it is likely that a 4m high structure would be partially visible to the surrounding receptors.

Within the medium to low distance zone, visibility is mainly to the east, with some fragmented views possible from higher ground to the west. Located in this eastern area are the northern extents of the Kuruman Hills. Located 10km to the east, views from this elevated location would be subjected to atmospheric influences reducing clarity of view. This area is also remote and has very few receptors.

Although the nature of the surrounding terrain is mainly flat, the Visual Extent is **unlikely to extend beyond the foreground / middle-ground**. The contained visibility is mainly due to the Bushveld vegetation and the old Hotazel waste rock dump located to the northwest of the site, and as such the Zone of Visual Influence of a 4m PV type landscape modification is likely to be **Local** in influence.

The High Exposure areas (2km) receptors include the R31 Road for the proposed PV site. The small town of Hotazel is located within the Medium to High distance zone but is topographically screened by the waste rock dump located between the village and the site. Due to the close proximity of the R31 which is routed adjacent to the proposed project areas, the Visual Exposure to the R3 is rated **High**.

3.2 Regional Landscape Character

Landscape character is defined by the U.K. Institute of Environmental Management and Assessment (IEMA) as the 'distinct and recognisable pattern of elements that occurs consistently in a particular type of landscape, and how this is perceived by people. It reflects particular combinations of geology, landform, soils, vegetation, land use and human settlement'. It creates the specific sense of place or essential character and 'spirit of the place' (IEMA, 2002). This section of the VIA identified the main landscape features in the areas surrounding the proposed project that define the surrounding landscape character.

The following landscape dominates the character of the region:

- Mining and associated infrastructure;
- Renewable energy (proposed); and
- Other rural landuse.

3.2.1 Mining and associated infrastructure

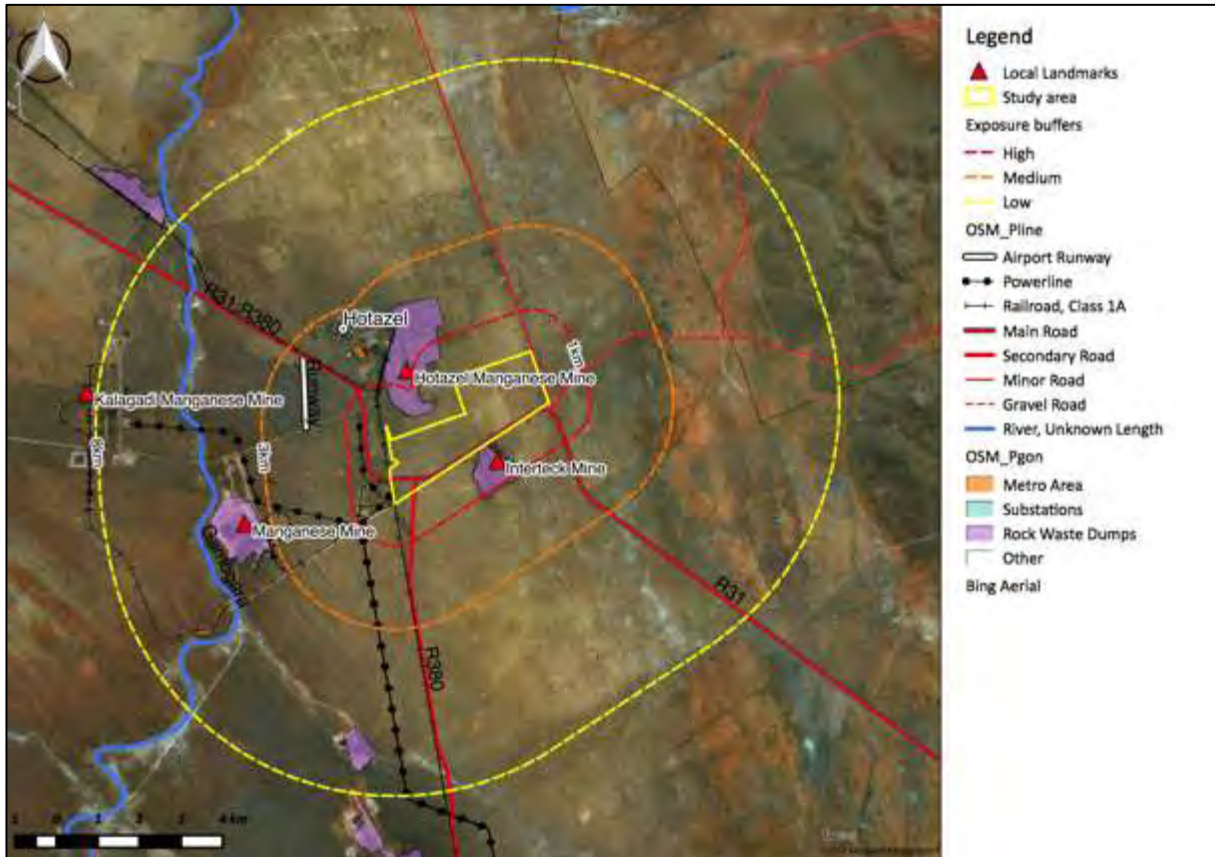


Figure 9: Key Landmarks and Infrastructure Map

A key factor influencing the regional landscape character is infrastructure that has been developed for the extraction of Manganese. As indicated by the purple areas in Figure 9 above, five large waste rock dumps are located within the vicinity of the proposed project associated with large Manganese Mines that require large structures and infrastructure. Also influencing the regional landscape is the associated electrical power and railway infrastructure required by the mines. These include two Eskom Substations (Hotazel and Umtu), multiple railway lines and multiple power lines. The Intertek Mine is an open pit type mine that is located directly west of the proposed PV study area. The mine is currently not operational. Located to the west of the power line study area is the Kalagadi Manganese Mine. As depicted in the photographs below, the mining structures and associated waste rock dumps are large in size and clearly dominate the attention of the casual observer. Due to the lower rainfalls of the area, rehabilitation of old rock dumps is limited and the dumps in the area do degrade the local landscape character.

The combination of the surrounding mining landscapes, which include large structures and waste rock dumps, in conjunction with the overhead railway structures and power lines, results in some degradation of the general landscape. This is especially experienced when the mines and infrastructures are viewed in close proximity, a strong level of visual contrast results. Due to the close proximity of the study area to the Intertek Mine site, as well as large power line infrastructure, the value of the site visual resources are reduced.



Figure 10: Photograph of the Kalagadi Manganese Mine as seen from the mine access road.



Figure 11: Photograph from the R31 south towards the Intertek Mine that is located adjacent to the south of the proposed site.



Figure 12: Photograph of the strong levels of contrast created by the combined railway line and power line infrastructure as seen from the proposed Umtu Power Line Routing.

3.2.2 Other Renewable Projects

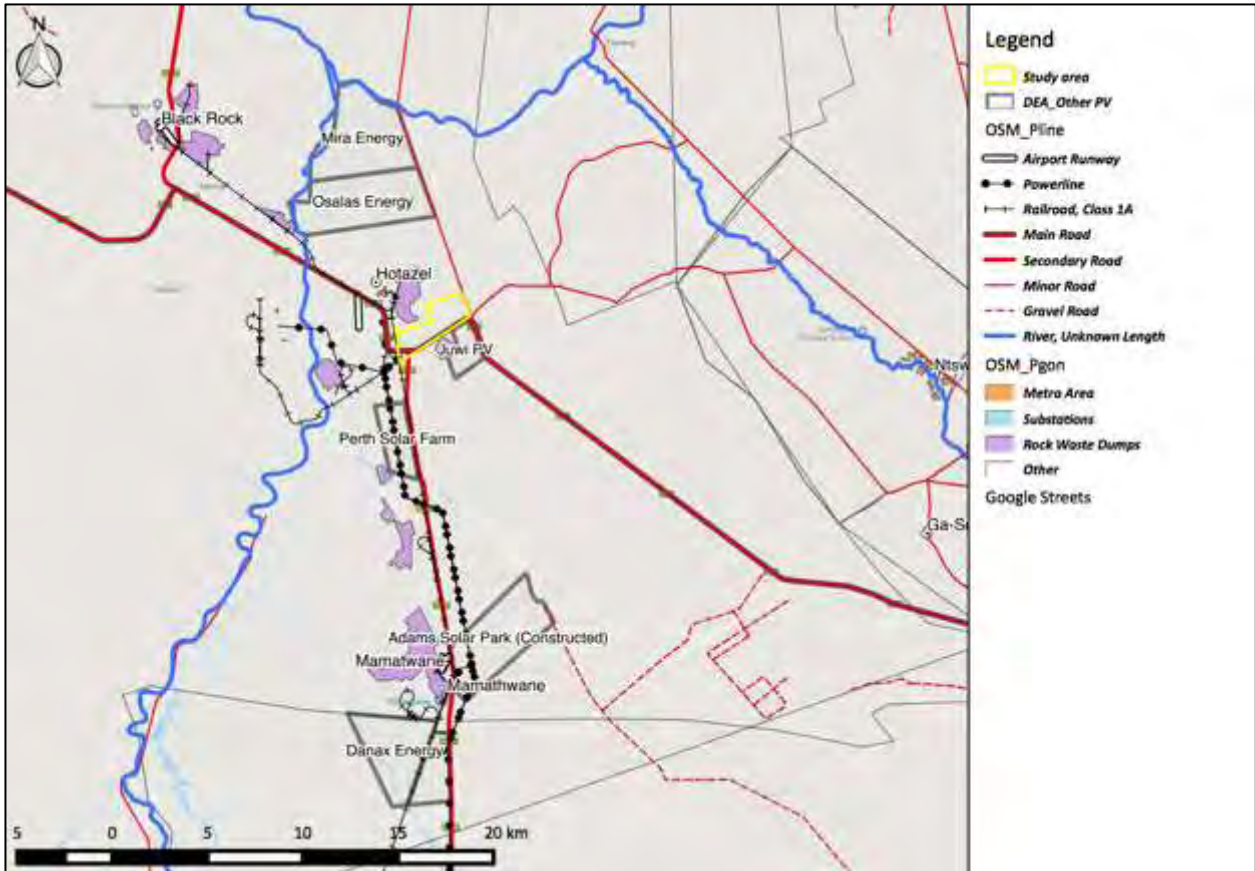


Figure 13: Map depicting the Renewable Energy mapping in relation to the approximate development area of the project.

A spatial query on the DEA Renewable Energy mapping found that there are six other projects proposed within 30 km. The two nearest developments are the Juwi PV, which is Proposed Hotazel Solar PV Energy Facility

located directly to the south, and Perth Solar Farm located approximately 4 km southwest of the study area. Of the six proposed projects, Adams Solar Park appears to be the only project that has been constructed. In terms of understanding cumulative effects, intervisibility of multiple PV projects has the potential to create a massing effect that is likely to dominate the attention of the casual observer. However, due to the surrounding bushveld vegetation that tends to localise the landscapes, cumulative negative effects from intervisibility degrading the regional landscape character is likely to be limited. As can be seen in the overlap incidence in the viewshed map in Figure 8, the close proximity of the proposed PV project to the Juwi site is likely to result in intervisibility between the two projects once constructed. Opportunities of retaining the existing bushveld trees along the R31 road could reduce this visual effect.

3.2.3 Other Rural Landuse

Other land use identified in the area includes limited residential / commercial landuse, and widespread cattle farming. The town of Hotazel was developed to house the workers of the adjacent Hotazel mining area and is located approximately four kilometres to the northwest of the PV study area. The town is small in size and does include some limited commerce. Views from the Hotazel residents towards the proposed study area are limited by the Bushveld vegetation, and by the location of the Hotazel Mine Waste Rock dumps between the town and the PV study site.

The Bushveld vegetation is well suited to cattle based agriculture. Due to the limited carrying capacity of the vegetation, farms are large in size and the farm dwellings are limited. Due to the Bushveld vegetation, views from the associated rural farmstead dwellings were limited. Also located in the area are game farms, which could offer some tourism potential. Other than possible game farming, no evidence of tourism activities were identified in the area.



Figure 14: Photograph of an isolated farmhouse as seen from the R31 which is located on the proposed property.

3.3 Site Landscape Character

In terms of the VRM methodology, landscape character is derived from a combination of scenic quality, receptor sensitivity to landscape change, and distance of the proposed landscape modification from key receptor points. The scenic quality is determined making use of the VRM scenic quality questionnaire (refer to addendum). In order to better understand the visual resources of the site, regional vegetation and terrain influences are described at a broad-brush level.

3.3.1 Vegetation

According to the South African National Biodiversity Institute (SANBI, 2012) Vegetation Map of South Africa, Lesotho and Swaziland, the vegetation biome, within which the study area is located, is defined as the Savanna Biome. Two main vegetation types were listed as intersecting with the study area: Gordonia Duneveld to the west, and Kathu Bushveld to the east (SANBI, 2012).

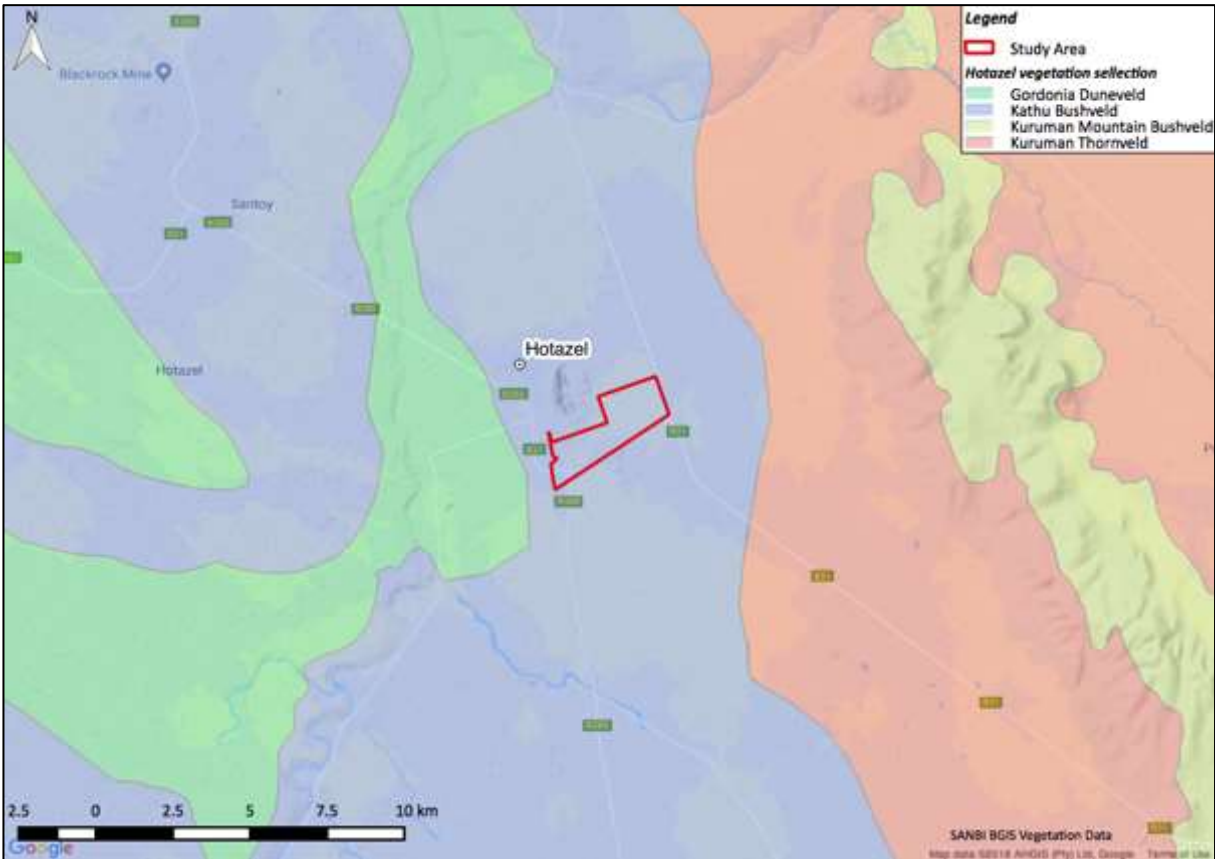


Figure 15: SANBI Vegetation Type Map (South African National Biodiversity Institute, 2012)

According to the SANBI website, “the Savanna Biome is the largest Biome in southern Africa, occupying 46% of its area, and over one-third of the area of South Africa. It is well developed over the Lowveld and Kalahari region of South Africa and is also the dominant vegetation in Botswana, Namibia and Zimbabwe”. The advantage of this Biome is that it is characterized by “a grassy ground layer and a distinct upper layer of woody plants” which can assist in visual screening. The lack of rain tends to prevent the upper vegetation layer from dominating, which coupled with fires and grazing, keeps the grass layer dominant. “The

shrub-tree layer may vary from 1 to 20m in height, but in Bushveld typically varies from 3 to 7m. The shrub-tree element may come to dominate the vegetation in areas which are being overgrazed” (SANBI, 2012). In the vicinity of the study area, medium height Bushveld vegetation was identified which, in relation to the flatter terrain, could assist in reducing the zone of visual influence.

Preliminary research by Simon Todd indicated that *Acacia haematoxylon* and *Acacia erioloba* are located on site with “the average density of *Acacia haematoxylon* is 25 trees/ha but up to 50 or more in some areas in the west especially” (Todd, ENVIRONMENTAL IMPACT ASSESSMENT FOR THE PROPOSED HOTAZEL SOLAR PV FACILITY AND ASSOCIATED INFRASTRUCTURE FAUNA & FLORA SPECIALIST SCOPING REPORT, 2018). As these are protected trees, Simon Todd would need to ascertain the significance of this impact to the vegetation. Preliminary visual recommendations are that the layout alternative that is less densely populated with these trees would be preferred. As there appears to be less tree vegetation on the eastern section of the site, it is likely that the eastern section would be the preferred visual location (pending further detailed study by Simon Todd).

3.3.2 Site Photographs and Descriptions

In order to convey the landscape character of the proposed PV site, photographs that characterise the site landscape sense of place were taken as mapped in Figure 16 below.

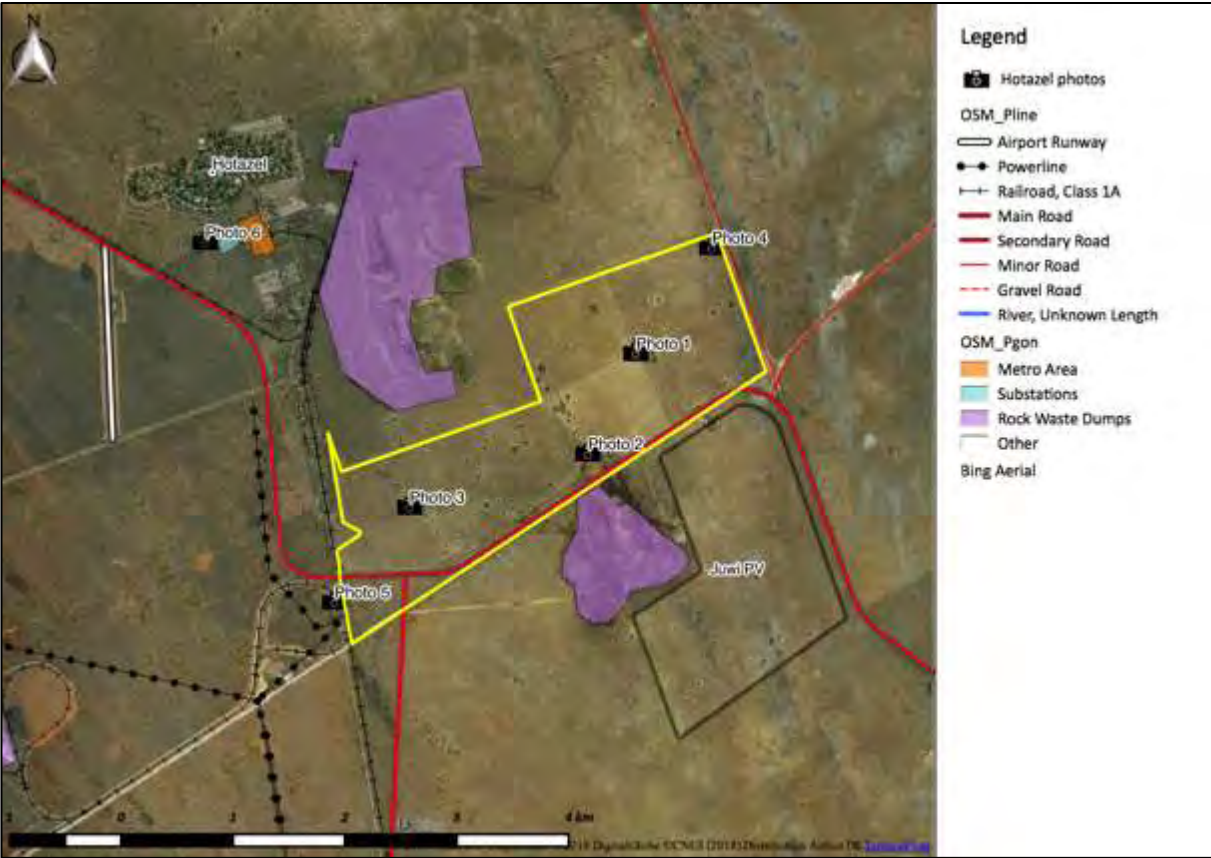


Figure 16: Proposed site photograph locality map.



Figure 17: View north from **Photo 1** of the grasslands and scattered bushveld trees with the old Hotazel Mine Waste Rock Dumps visible in the background.



Figure 18: View north from **Photo 2** of farm roads and more dense Kathu Bushveld trees.



Figure 19: View north from **Photo 3** of the higher bushveld vegetation.



Figure 20: View west from **Photo 4** of a similar bushveld vegetation.



Figure 21: View north from **Photo 5** of the existing power line and railway line infrastructure along which the proposed power line would be routed.



Figure 22: View west from **Photo 6** of the existing Hotazel Substation to which the proposed power line would be routed.

3.3.3 *Scenic Quality and Receptor Sensitivity Ratings*

The single landscape type defined as Rural Kathu Bushveld, was subjected to an analysis of its intrinsic value as a visual resource by quantifying Scenic Quality and Receptor Sensitivity to landscape change of the property. This can be viewed in Annexure 3.

The **Scenic Quality** scores are totalled and assigned an A (High scenic quality), B (Moderate scenic quality) or C (Low scenic quality) category based on the following split: A=

scenic quality rating of ≥ 19 ; B = rating of 12 – 18, C= rating of ≤ 11 (USDI., 2004). If applicable, the Cultural Modification can be assigned a negative value if the landscape is significantly degraded by human-made modifications. **Receptor Sensitivity** levels are a measure of public concern for scenic quality. Receptor sensitivity to landscape change is determined by rating the key factors relating to the perception of landscape change in terms of Low to High.

Table 4: Scenic Quality Rating Table

Aspect	Rating	Motivation
Landform	1	Generally flat terrain that has few or no interesting landscape features.
Vegetation	2	Some variety of vegetation, but only one or two major types.
Water	0	No presence of water was apparent on the site
Colour	2	Subtle colour variation created by the grey-green vegetation and the browns of the veld grasses.
Scarcity	2	Interesting within its setting but fairly common within the region.
Adjacent scenery	1	The dominance of the adjacent power lines, as well as the clear views of Intertek Mine and Hotazel Mine waste rock dumps located to south and west, reduce the scenic value of the adjacent scenery.
Cultural Modif.	2	Cultural modifications on site are limited to farm tracks and a single disused structure, which maintains the existing rural agricultural sense of place.

Table 5: Receptor Sensitivity Rating Table

Aspect	Rating	Motivation
Type user	Low	Due to the close proximity of the proposed site to the adjacent mines where waste rock dumps are visible, the local farming community are unlikely to be sensitive to landscape change.
Amount use	Medium	The site is located adjacent to the R31 District Road, but due to the remote locality of the site, traffic is limited and the site is partially screened due to the bushveld vegetation.
Public interest	Low	Given the strong mining landscape context of the site and the domination of mining within the local economy, it is likely that public interest in maintaining visual quality is low.
Adjacent land users	Low	Adjacent users are limited to mining activities are isolated farmers and are likely to have a low sensitivity to landscape change due to the mining activities located in close proximity to the site.
Special zoning	Medium	The property is currently zoned rural agricultural which restricts development to agricultural purposes. Acacia vegetation on the site is also protected.

3.3.4 Site Visual Resources

The BLM methodology defines four Classes that represent the relative value of the visual resources of an area and are defined making use of the VRM Matrix below:

- i. **Classes I and II** are the most valued
- ii. **Class III** represent a moderate value
- iii. **Class IV** is of least value

The Classes are not prescriptive and are utilised as a guideline to determine the carrying capacity of a visually preferred landscape that is utilised to assess the suitability of the landscape change associated with the proposed project. The Visual Inventory Classes are

defined using the matrix below and with motivation, can be adjusted to Visual Resource Management Classes which take zoning and regional planning into consideration if applicable.

Table 6: Scenic Quality and Receptor Sensitivity Summary Table

Visual Resources	Scenic Quality									Receptor Sensitivity						VRM	
	A= scenic quality rating of ≥19; B = rating of 12 – 18, C= rating of ≤11									H = High; M = Medium; L = Low							
NAME	Landform	Vegetation	Water	Colour	Scarcity	Adjacent Landscape	Cultural Modifications	Sum	Rating	Type of Users	Amount of Use	Public Interest	Adjacent Land Uses	Special Areas	Rating	Visual Inventory Class	Visual Resource Management Class
Kathu Bushveld	1	2	0	2	2	1	2	11	C	L	M	L	L	M	M	IV	III

Class I & II

Class I is typically assigned when legislation restricts development in certain areas (Class I), or when the Scenic Quality and Receptor Sensitivity is very high (Class II). The visual objective is to preserve the existing character of the landscape, the level of change to the characteristic landscape should be very low, and must not attract attention. As no significant scenic resources were identified within the area, Class I and Class II Visual Objectives were not assigned.

Class III

Due to the zoning of the property as Agriculture, and the current land use being related to agriculture, the Visual Inventory Class IV was amended to a Visual Resource Management Class III. The Class III objective is to partially retain the existing character of the landscape, where the level of change to the characteristic landscape should be moderate. Management activities may attract attention, but should not dominate the view of the casual observer, and changes should repeat the basic elements found in the predominant natural features of the characteristic landscape. However, careful consideration of the protected trees located on the property needs to be implemented.

Class IV

The Class IV objective is to provide for management activities that require major modifications of the existing character of the landscape. Due to the zoning of the property as Agriculture, and the current farming land uses of the surrounding areas, very high levels of visual intrusion could be degrading to the surrounding landscape character. As such, no Class IV areas were defined.

4 PRELIMINARY FINDINGS

Landscape Context

As can be seen in the Digital Elevation Model map above, the topography of the greater area surrounding the study area is relatively flat with the exception of the low hill range to the east. The main drainage of the greater region is to the north via the Gamogara River (approx. 7km west), which is a tributary of the larger Kuruman River located approximately 10km to the north. The only natural topographic feature within the greater area is the Kuruman Hills that are located approximately 15km to the southeast of the study site and rise approximately 100m above the generated terrain. Due to the distance between the site and the hill feature, landscape change on the site is thus highly unlikely to influence the Kuruman Hills sense of place.


A key factor also influencing the landscape character of the site is the close proximity to mining landscapes. These include four large Manganese Mines which require large structures and generate large waste rock dumps. Also influencing the regional landscape is the associated electrical power and railway infrastructure required by the mines. These include two Eskom Substations (Hotazel and Umtu), multiple railway lines and multiple power lines. A new 132kV Eskom power line is currently under construction on the property routed adjacent to the R31 road. The combination of the surrounding mining landscapes, which include large structures and waste rock dumps, in conjunction with the overhead railway structures and power lines, results in some degradation of the general landscape and increased the Visual Absorption Capacity of the landscape. This is especially experienced when the mines and infrastructures are viewed in close proximity as strong levels of visual contrast result. Due to the close proximity of the study area to the Intertek Mine site, as well as large existing power line infrastructure, the value of the area visual resources are reduced.

Project Visibility and Exposure

Due to the Bushveld vegetation and surrounding mining landscapes, the Zone of Visual Influence of a 6m PV type landscape modification is likely to be **Local** in influence. Background views could also be extended to rural farmsteads, however due to the remoteness of the location and Bushveld vegetation, this is unlikely. Due to the close proximity of the proposed project areas to the R31 located adjacent to the site, the Visual Exposure to the proposed project is rated as **High**.

Site Scenic Quality

One broad-brush landscape was identified during the site visit and is listed and mapped below:

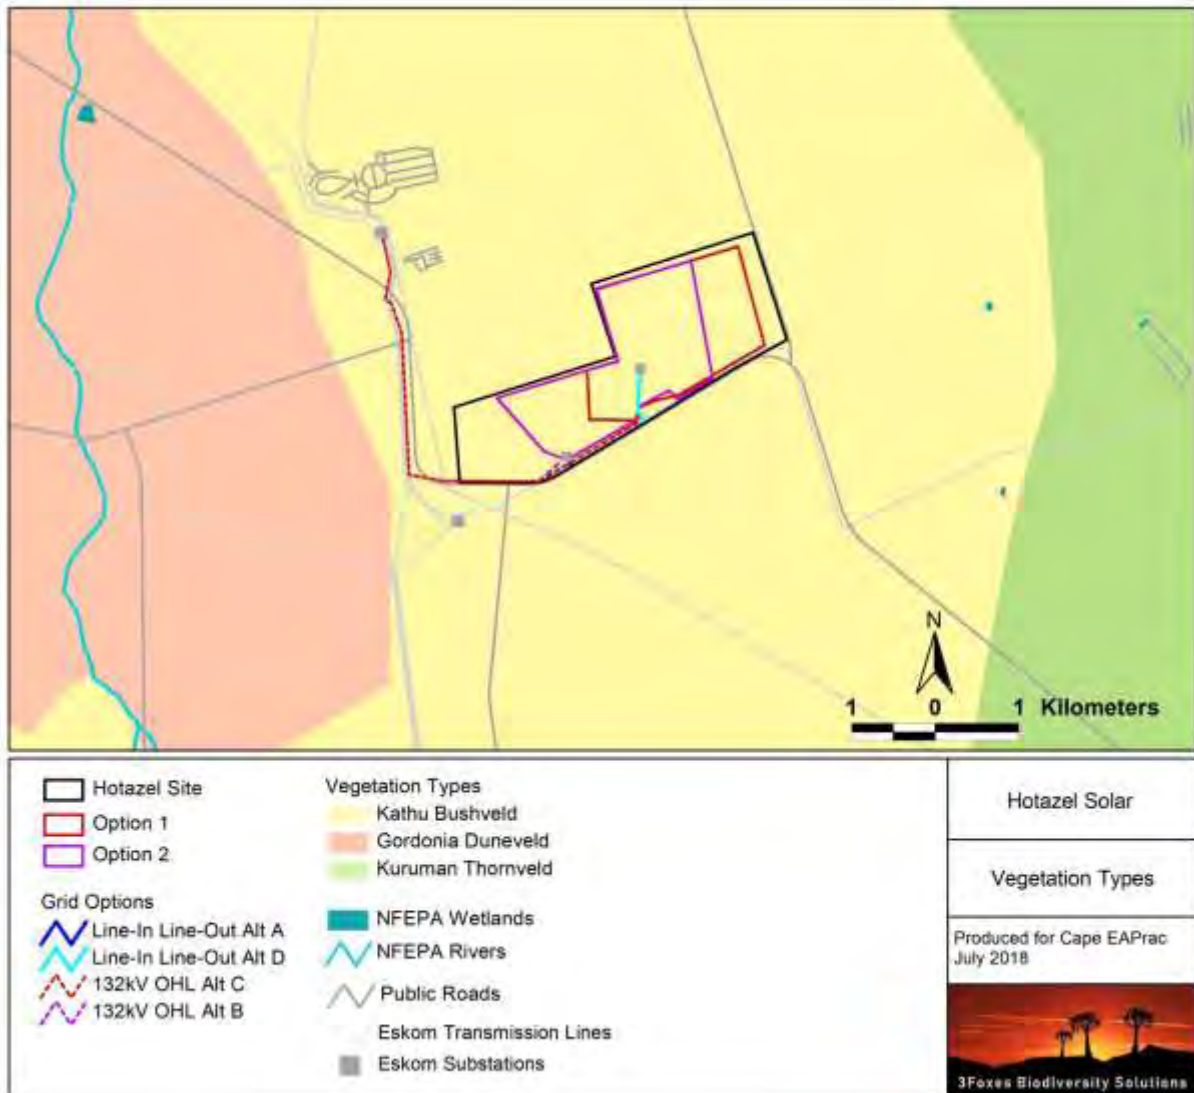

Based on the VRM rating criteria, the overall scenic quality of the site is rated as **Medium to Low**. This was mainly due to the close proximity of the study area to the adjacent Intertek Mine, which degrades the local visual resources.

The botanical specialist has identified that *Acacia haematoxylon* and *Acacia erioloba* are located on site with “the average density of *Acacia haematoxylon* is 25 trees/ha but up to 50 or more in some areas in the west especially” (Todd ,2018). As these are protected trees, and do add to the local bushveld sense of place, the layout should be designed so as to minimise the impact on these trees. The impact assessment findings of the botanical specialist will need to be considered in the final VIA.

Receptor Sensitivity

Based on the VRM rating criteria, the overall Receptor Sensitivity to the site is the R31 located adjacent to the site, and receptor sensitivity is thus rated as **Medium to Low**. This is due to the relatively remote location of the site, and the close proximity to existing mining landscapes. Other than game farming, no tourism activities were identified during the site visit.

5 CONCLUSION

The VIA baseline found that visual intrusion of the proposed PV project is unlikely to result in a significant loss of visual resources, and as such the proposed project should proceed to the EIA phase.

Preliminary research by the botanical specialist indicated that *Acacia haematoxylon* and *Acacia erioloba* are located on site. The impact assessment findings of the botanical specialist will need to be considered in the final VIA.

6 REFERENCES

- Atlantic Energy Partners (Pty) Ltd. (2018). *Layout Development Report Gaetsewe*.
- Gamagara Municipality. (2010). *Gamagara Municipality SDF*.
- Hull, R. B., & Bishop, I. E. (1988). *Scenic Impacts of Electricity Power Mine: The Influence of Landscape Type and Observer Distance*. *Journal of Environmental Management*.(27) Pg 99-108.
- IEMA. (2002). *U.K Institute of Environmental Management and Assessment (IEMA). 'Guidelines for Landscape and Visual Impact Assessment' Second Edition, Spon Press. Pg 44.*
- NASA, A. G. (2009). *Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER) Global Digital Elevation Model Version 2 (GDEM V2 2011)*. Ministry of Economy, Trade, and Industry (METI) of Japan and United States National Aeronauti.
- NELPAG. *New England Light Pollution Advisory Group (NELPAG) <http://cfa/www.harvard.edu/cfa/ps/nelpag.html> and Sky & Telescope <http://SkyandTelescope.com/>. NELPAG and Sky & Telescope support the International Dark-Sky Association (IDA) (<http://www.darksky.o>.*
- Oberholzer, B. (2005). *Guideline for involving visual and aesthetic specialists in EIA processes: Edition 1*. CSIR Report No ENV-S-C 2005 053 F. Republic of South Africa, Provincial Government of the Western Cape, Department of Environmental Affairs and Deve.
- Todd, S. (2018). *ENVIRONMENTAL IMPACT ASSESSMENT FOR THE PROPOSED GAETSEWE SOLAR PV FACILITY AND ASSOCIATED INFRASTRUCTURE, KATHU, NORTHERN CAPE: FAUNA & FLORA SPECIALIST SCOPING REPORT*.
- Todd, S. (2018). *ENVIRONMENTAL IMPACT ASSESSMENT FOR THE PROPOSED HOTAZEL SOLAR PV FACILITY AND ASSOCIATED INFRASTRUCTURE FAUNA & FLORA SPECIALIST SCOPING REPORT*.
- U.K Institute of Environmental Management and Assessment (IEMA). (2002). *Guidelines for Landscape and Visual Impact Assessment (Second Edition ed.)*. Spon Press.
- USDI., B. (2004). *Bureau of Land Management, U.S. Department of Interior. 2004. Visual Resource Management Manual 8400*.

7 ANNEXURE 1: SPECIALIST DECLARATION OF INDEPENDENCE

DETAILS OF SPECIALIST AND DECLARATION OF INTEREST

Specialist:	VRM AFRICA CC		
Contact person:	STEPHEN STEAD		
Postal address:	P.O BOX 7233, BLANCO		
Postal code:	6531	Cell:	083 560 9911
Telephone:	044 874 0020	Fax:	086 653 3738
E-mail:	steve@vrma.co.za		
Professional affiliation(s) (if any)	Association of Professional Heritage Practitioners South Africa (APHP)		

The specialist appointed in terms of the Regulations

I, **STEPHEN STEAD**, declare that ---

General declaration:

- I act as the independent specialist in this application
I will perform the work relating to the application in an objective manner, even if this results in views and findings that are not favourable to the applicant
- I declare that there are no circumstances that may compromise my objectivity in performing such work;
- I have expertise in conducting the specialist report relevant to this application, including knowledge of the Act, regulations and any guidelines that have relevance to the proposed activity;
- I will comply with the Act, regulations and all other applicable legislation;
- I have no, and will not engage in, conflicting interests in the undertaking of the activity;
- I undertake to disclose to the applicant and the competent authority all material information in my possession that reasonably has or may have the potential of influencing - any decision to be taken with respect to the application by the competent authority; and - the objectivity of any report, plan or document to be prepared by myself for submission to the competent authority;
- all the particulars furnished by me in this form are true and correct;
and
- I realise that a false declaration is an offence in terms of Regulation 71 and is punishable in terms of section 24F of the Act.



Signature of the specialist:

SILVER SOLUTIONS TRADING AS VRM AFRICA

7.1 Curriculum Vitae

Curriculum Vitae (CV)

1. **Position:** Owner / Director
 2. **Name of Firm:** Visual Resource Management Africa cc (www.vrma.co.za)
 3. **Name of Staff:** Stephen Stead
 4. **Date of Birth:** 9 June 1967
 5. **Nationality:** South African
 6. **Contact Details:** **Tel: +27 (0) 44 876 0020**
Cell: +27 (0) 83 560 9911
Email: steve@vrma.co.za
-

7. Educational qualifications:

- University of Natal (Pietermaritzburg):
- Bachelor of Arts: Psychology and Geography
- Bachelor of Arts (Hons): Human Geography and Geographic Information Management Systems

8. Professional Accreditation

- Association of Professional Heritage Practitioners (APHP) Western Cape
 - Accredited VIA practitioner member of the Association (2011)

9. Association involvement:

- International Association of Impact Assessment (IAIA) South African Affiliate
 - Past President (2012 - 2013)
 - President (2012)
 - President-Elect (2011)
 - Conference Co-ordinator (2010)
 - National Executive Committee member (2009)
 - Southern Cape Chairperson (2008)

10. Conferences Attended:

- IAIAAsa 2012
- IAIAAsa 2011
- IAIA International 2011 (Mexico)
- IAIAAsa 2010
- IAIAAsa 2009
- IAIAAsa 2007

11. Continued Professional Development:

- Integrating Sustainability with Environment Assessment in South Africa (IAIAAsa Conference, 1 day)
- Achieving the full potential of SIA (Mexico, IAIA Conference, 2 days 2011)

- Researching and Assessing Heritage Resources Course (University of Cape Town, 5 days, 2009)

12. Countries of Work Experience:

- South Africa, Mozambique, Malawi, Lesotho, Kenya and Namibia

13. Relevant Experience:

Stephen gained six years of experience in the field of Geographic Information Systems mapping and spatial analysis working as a consultant for the KwaZulu-Natal Department of Health and then with an Environmental Impact Assessment company based in the Western Cape. In 2004 he set up the company Visual Resource Management Africa which specializes in visual resource management and visual impact assessments in Africa. The company makes use of the well documented Visual Resource Management methodology developed by the Bureau of Land Management (USA) for assessing the suitability of landscape modifications. In association with ILASA qualified landscape architect Liesel Stokes, he has assessed of over 100 major landscape modifications through-out southern and eastern Africa. The business has been operating for eight years and has successfully established and retained a large client base throughout Southern Africa which include amongst other, Rio Tinto (Pty) Ltd, Bannerman (Pty) Ltd, Anglo Coal (Pty) Ltd, Eskom (Pty) Ltd, NamPower and Vale (Pty) Ltd, Ariva (Pty) Ltd, Harmony Gold (Pty) Ltd, Mellium Challenge Account (USA), Pretoria Portland Cement (Pty) Ltd

14. Languages:

- English – First Language
- Afrikaans – fair in speaking, reading and writing

15. Projects:

A list of **some** of the large scale projects that VRMA has assessed has been attached below with the client list indicated per project (Refer to www.vrma.co.za for a full list of projects undertaken).

YEAR	NAME	DESCRIPTION	LOCATION
2016	Kokerboom WEF	Wind Energy	Northern Cape
2016	Hotazel PV	Solar Energy	Northern Cape
2016	Eskom Sekgame Bulkop Power Line	Infrastructure	Northern Cape
2016	Ngonye Hydroelectric	Hydroelectric	Zambia
2016	Levensdal Infill	Settlement	Western Cape
2016	Arandis CSP	Solar Energy	Namibia
2016	Bonnievale PV	Solar Energy	Western Cape
2015	Noblesfontein 2 & 3 WEF (Scoping)	Wind Energy	Eastern Cape
2015	Ephraim Sun SEF	Solar Energy	Nothern Cape
2015	Dyasonsklip and Sirius Grid TX	Solar Energy	Nothern Cape
2015	Dyasonsklip PV	Solar Energy	Nothern Cape
2015	Zeerust PV expansion and transmission line	Solar Energy	North West
2015	Bloemsmond SEF	Solar Energy	Nothern Cape
2015	Juwi Copperton PV	Solar Energy	Nothern Cape
2015	Humansrus Capital 14 PV	Solar Energy	Nothern Cape
2015	Humansrus Capital 13 PV	Solar Energy	Nothern Cape
2015	Spitzkop East WEF (Scoping)	Solar Energy	Western Cape

2015	Lofdal Rare Earth Mine and Infrastructure	Extraction	Namibia
2015	AEP Kathu PV	Solar Energy	Nothern Cape
2014	AEP Mogobe SEF	Solar Energy	Nothern Cape
2014	Bonnievale SEF	Solar Energy	Western Cape
2014	AEP Legoko SEF	Solar Energy	Northern Cape
2014	Postmasburg PV	Solar Energy	Northern Cape
2014	Joram Solar	Solar Energy	Northern Cape
2014	RERE PV Postmasberg	Solar Energy	Northern Cape
2014	RERE CPV Upington	Solar Energy	Northern Cape
2014	Rio Tinto RUL Desalination Plant	Industrial	Namibia
2014	NamPower PV * 3	Solar Energy	Namibia
2014	Pemba Oil and Gas Port Expansion	Industrial	Mozambique
2014	Brightsource CSP Upington	Solar Energy	Northern Cape
2014	Witsand WEF (Scoping)	Wind Energy	Western Cape
2014	Kangnas WEF	Wind Energy	Western Cape
2013	Cape Winelands DM Regional Landfill	Industrial	Western Cape
2013	Drennan PV Solar Park	Solar Energy	Eastern Cape
2013	Eastern Cape Mari-culture	Mari-culture	Eastern Cape
2013	Eskom Pantom Pass Substation	Substation /Tx lines	Knysna
2013	Frankfort Paper Mill	Plant	Free State
2013	Gibson Bay Wind Farm Transmission lines	Tranmission lines	Eastern Cape
2013	Houhoek Eskom Substation	Substation /Tx lines	Western Cape
2013	Mulilo PV Solar Energy Sites (x4)	Solar Energy	Northern Cape
2013	Namies Wind Farm	Wind Energy	Northern Cape
2013	Rossing Z20 Pit and WRD	Mining	Namibia
2013	SAPPI Boiler Upgrade	Plant	Mpumalanga
2013	Tumela WRD	Mine	North West
2013	Weskusfleur Substation (Koeburg)	Substation /Tx lines	Western Cape
2013	Yzermyn coal mine	Mine	Mpumalanga
2012	Afrisam	Mine	Saldana
2012	Bitterfontein	Solar Energy	N Cape
2012	Kangnas PV	Solar Energy	N Cape
2012	Kangnas Wind	Solar Energy	N Cape
2012	Kathu CSP Tower	Solar Energy	Northern Cape
2012	Kobong Hydro	Hydro & Powerline	Lesotho
2012	Letseng Diamond Mine Upgrade	Mine	Lesotho
2012	Lunsklip Windfarm	Wind Energy	Stilbaai
2012	Mozambique Gas Engine Power Plant	Plant	Mozambique
2012	Ncondezi Thermal Power Station	Substation /Tx lines	Mozambique
2012	Sasol CSP Tower	Solar Power	Free State
2012	Sasol Upington CSP Tower	Solar Power	Northern Cape

2011	Beaufort West PV Solar Power Station	Solar Energy	Beaufort West
2011	Beaufort West Wind Farm	Wind Energy	Beaufort West
2011	De Bakke Cell Phone Mast	Mast	Western Cape
2011	ERF 7288 PV	Solar Energy	Beaufort West
2011	Gecko Industrial park	Industrial	Namibia
2011	Green View Estates	Residential	Mossel Bay
2011	Hoodia Solar	Solar Energy	Beaufort West
2011	Kalahari Solar Power Project	Solar Energy	Northern Cape
2011	Khanyisa Power Station	Power Station	Western Cape
2011	Olvyn Kolk PV	Solar Energy	Northern Cape
2011	Otjikoto Gold Mine	Mining	Namibia
2011	PPC Rheebeek West Upgrade	Industrial	Western Cape
2011	Slopes analysis Erf 7288 Beaufort West	Slopes	Beaufort West
2011	Southern Arterial	Road	George
2010	Bannerman Etango Uranium Mine	Mining	Namibia
2010	Bantamskip Transmission	Transmission	Eastern Cape
2010	Beaufort West Urban Edge	Mapping	Beaufort West
2010	Bon Accord Nickel Mine	Mine	Barbeton
2010	Etosha National Park Infrastructure	Housing	Namibia
2010	Herolds Bay N2 Development Baseline	Residential	George
2010	MET Housing Etosha	Housing	Namibia
2010	MET Housing Etosha Amended MCDM	Residential	Namibia
2010	MTN Lattice Hub Tower	Structure	George
2010	N2 Herolds Bay Residential	Residential	Herolds Bay
2010	Onifin(Pty) Ltd Hartenbos Quarry Extension	Mining	Mossel Bay
2010	Still Bay East	Mapping	SA, WC
2010	Vale Moatize Coal Mine and Railwayline	Mining_rail	Mozambique
2010	Vodacom Mast	Structure	Reichterbosch
2010	Wadrif Dam	Dam	Beaufort West
2009	Asazani Zinyoka UISP Housing	Residential Infill	Mossel Bay
2009	Eden Telecommunication Tower	Structure Tower	George
2009	George Landscape Characterisation	George SDF	George
2009	George Visual Resource Management	George SDF	George
2009	George Western Bypass	Structure Road	George
2009	Knysna Affordable Housing Heidevallei	Residential Infill	Knysna
2009	Knysna Affordable Housing Hornlee Project	Residential Infill	Knysna
2009	Rossing Uranium Mine Phase 2	Mining	Namibia
2009	Sun Ray Wind Farm	Wind Energy	Still Bay
2008	Bantamskip Transmission Lines Scoping	Transmission	Western Cape
2008	Erf 251 Damage Assessment	Residential VIA	Great Brak

2008	Erongo Uranium Rush SEA	SEA	Namibia
2008	Evander South Gold Mine Preliminary VIA	Mining	Mpumalanga
2008	George Open Spaces System	George SDF	George
2008	Hartenbos River Park	Residential VIA	Hartenbos
2008	Kaaimans Project	Residential	Wilderness
2008	Lagoon Garden Estate	Residential VIA	Great Brak
2008	Moquini Beach Hotel	Resort	Mossel Bay
2008	NamPower Coal fired Power Station	Power Station	Namibia
2008	Oasis Development	Residential VIA	Plettenberg Bay
2008	RUL Sulphur Handling Facility	Mining	Walvis Bay
2008	Stonehouse Development	Residential VIA	Plettenberg Bay
2008	Walvis Bay Power Station	Structure	Namibia
2007	Calitzdorp Retirement Village	Residential VIA	Calitzdorp
2007	Calitzdorp Visualisation	Visualisation	Calitzdorp
2007	Camdeboo Estate	Residential VIA	Graaff Reinet
2007	Destiny Africa	Residential	George
2007	Droogfontein Farm 245	Residential VIA	Danabaai
2007	Floating Liquefied Natural Gas Facility	Structure tanker	Mossel Bay
2007	George Municipality Densification	George SDF	George
2007	Kloofsig Development	Residential VIA	Vleesbaai
2007	OCGT Power Plant Extension	Structure Power Plant	Mossel Bay
2007	Oudtshoorn Municipality SDF	Mapping	Oudtshoorn
2007	Oudtshoorn Shopping Complex	Structure Mall	Oudtshoorn
2007	Pezula Infill (Noetzie)	Residential VIA	Knysna
2007	Pierpoint Nature Reserve	Residential VIA	Knysna
2007	Pinnacle Point Golf Estate	Golf/Residential	Mossel Bay
2007	Rheebok Development Erf 252 Apeal	Residential VIA	Great Brak
2007	Rossing Uranium Mine Phase 1	Mining	Namibia
2007	Ryst Kuil/Riet Kuil Uranium Mine	Mining	Beaufort West
2007	Sedgefield Water Works	Structure	Sedgefield
2007	Sulphur Handling Station Walvis Bay Port	Industrial	Namibia
2007	Trekkopje Uranium Mine	Mining	Namibia
2007	Weldon Kaya	Residential VIA	Plettenberg Bay
2006	Farm Dwarsweg 260	Residential VIA	Great Brak
2006	Fynboskruin Extention	Residential VIA	Sedgefield
2006	Hanglip Golf and Residential Estate	Golf/Residential	Plettenberg Bay
2006	Hansmoeskraal	Slopes Analysis	George
2006	Hartenbos Landgoed Phase 2	Residential VIA	Hartenbos
2006	Hersham Security Village	Residential VIA	Great Brak
2006	Ladywood Farm 437	Residential VIA	Plettenberg Bay
2006	Le Grand Golf and Residential Estate	Golf/Residential	George

2006	Paradise Coast	Residential VIA	Mossel Bay
2006	Paradyskloof Residential Estate	Residential VIA	Stellenbosch
2006	Riverhill Residential Estate	Residential VIA	Wilderness
2006	Wolwe Eiland Access Route	Road	Victoria Bay
2005	Harmony Gold Mine	Mining	Mpumalanga.
2005	Knysna River Reserve	Residential VIA	Knysna
2005	Lagoon Bay Lifestyle Estate	Residential VIA	Glentana
2005	Outeniquabosch Safari Park	Residential	Mossel Bay
2005	Proposed Hotel Farm Gansevallei	Resort	Plettenberg Bay
2005	Uitzicht Development	Residential VIA	Knysna
2005	West Dunes	Residential VIA	Knysna
2005	Wilderness Erf 2278	Residential VIA	Wilderness
2005	Wolwe Eiland Eco & Nature Estate	Residential VIA	Victoria Bay
2005	Zebra Clay Mine	Mining	Zebra
2004	Gansevallei Hotel	Residential VIA	Plettenberg Bay
2004	Lakes Eco and Golf Estate	Golf/Residential	Sedgefield
2004	Trekkopje Desalination Plant	Structure Plant	Namibia
1995	Greater Durban Informal Housing Analysis	Photogrametry	Durban

8 ANNEXURE 2: VRM CHECK SHEETS

Scenic Quality Rating Questionnaire

KEY FACTORS	RATING CRITERIA AND SCORE		
	5	3	1
Land Form	High vertical relief as expressed in prominent cliffs, spires or massive rock outcrops, or severe surface variation or highly eroded formations or detail features that are dominating and exceptionally striking and intriguing.	Steep-sided river valleys, or interesting erosion patterns or variety in size and shape of landforms; or detail features that are interesting, though not dominant or exceptional.	Low rolling hills, foothills or flat valley bottoms; few or no interesting landscape features.
Vegetation	A variety of vegetative types as expressed in interesting forms, textures and patterns.	Some variety of vegetation, but only one or two major types.	Little or no variety or contrast in vegetation.
Water	Clear and clean appearing, still or cascading white water, any of which are a dominant factor in the landscape.	Flowing, or still, but not dominant in the landscape.	Absent, or present but not noticeable.
Colour	Rich colour combinations, variety or vivid colour: or pleasing contrasts in the soil, rock, vegetation, water.	Some intensity or variety in colours and contrast of the soil, rock and vegetation, but not a dominant scenic element.	Subtle colour variations contrast or interest: generally mute tones.
Adjacent Scenery	Adjacent scenery greatly enhances visual quality.	Adjacent scenery moderately enhances overall visual quality.	Adjacent scenery has little or no influence on overall visual quality.
Scarcity	One of a kind: unusually memorable, or very rare within region. Consistent chance for exceptional wildlife or wildflower viewing etc.	Distinctive, though somewhat similar to others within the region.	Interesting within its setting, but fairly common within the region.
SCORE	2	0	-4
Cultural Modification	Modifications add favourably to visual variety, while promoting visual harmony.	Modifications add little or no visual variety to the area, and introduce no discordant elements.	Modifications add variety but are very discordant and promote strong disharmony.

Sensitivity Level Rating Questionnaire

FACTORS	QUESTIONS	
Type of Users	Maintenance of visual quality is:	
	A major concern for most users	High
	A moderate concern for most users	Moderate
	A low concern for most users	Low
Amount of use	Maintenance of visual quality becomes more important as the level of use increases:	
	A high level of use	High
	Moderately level of use	Moderate
	Low level of use	Low
Public interest	Maintenance of visual quality:	
	A major concern for most users	High
	A moderate concern for most users	Moderate
	A low concern for most users	Low
Adjacent land Users	Maintenance of visual quality to sustain adjacent land use objectives is:	
	Very important	High
	Moderately important	Moderate
	Slightly important	Low
Special Areas	Maintenance of visual quality to sustain Special Area management objectives is:	
	Very important	High
	Moderately important	Moderate
	Slightly important	Low